GULFOOD 2024 - PHILIPPINE PAVILION

TECHNICAL DRAWINGS

*sample booth with 2 lighted acrylic

1/4" THICKNESS

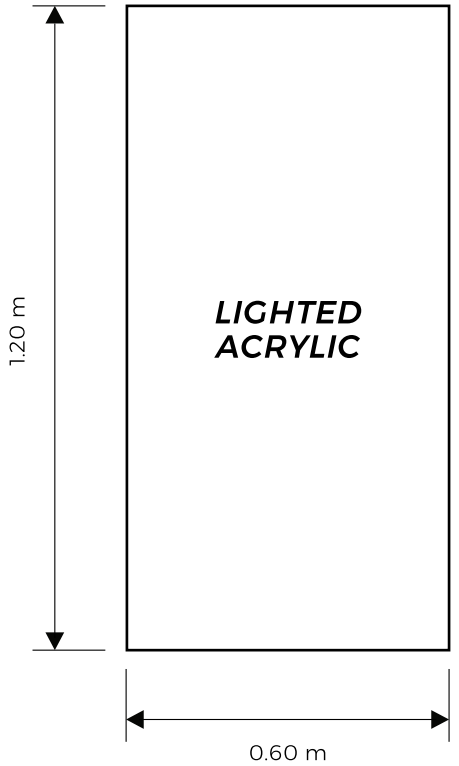

LEGEND:

- COMPANY BOARD (EXHIBITORS)
- BOOTH BOARD (ORGANIZER)





BACKLIT COMPANY BOARD

BOOTH DETAILS

	PROJECT: GULFOOD 2024	
	TITLE: PHILIPPINE PAVILION	
DESIGNED BY: ACGV	LOCATION: DWTC, DUBAI, UAE	
DATE/TIME: 12.20.23	LOCATION: BOOTH DETAILS	SHEET NO. 20

TECHNICAL DRAWINGS

JAPANESE TYPE DOOR CURTAIN WITH DIGITAL PRINT

(material: canvas, attached to a curtain rod)

**sample booth with japanese type door curtain*

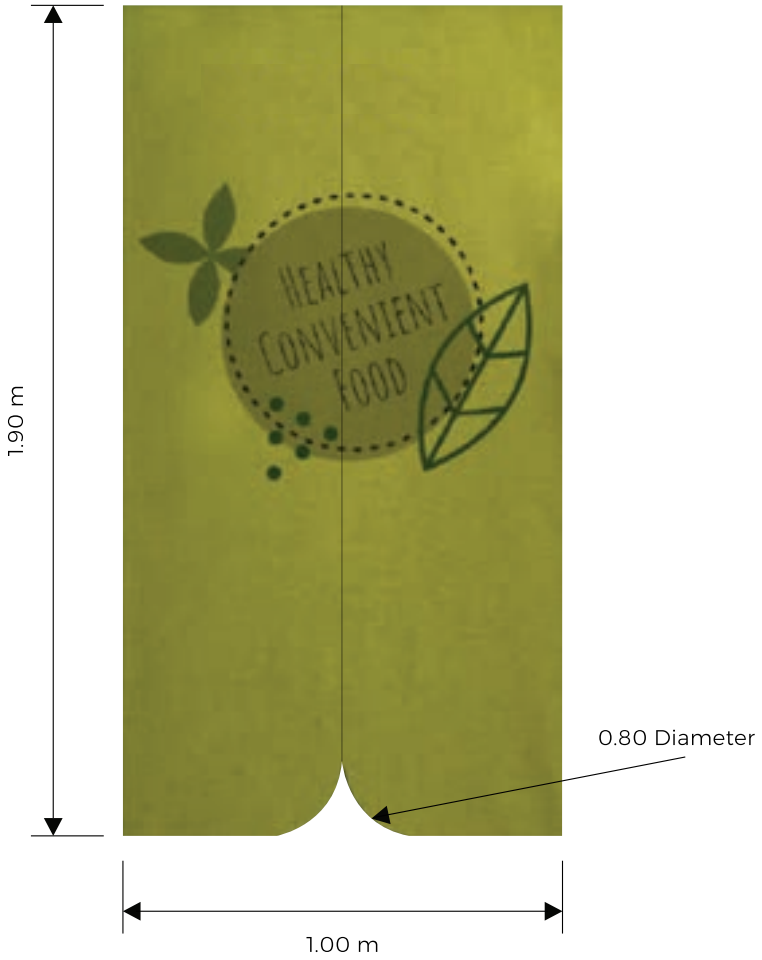

LEGEND:

DOOR CURTAIN

JAPANESE TYPE DOOR CURTAIN

BOOTH DETAILS





	PROJECT: GULFOOD 2024	
	TITLE: PHILIPPINE PAVILION	
DESIGNED BY: ACGV	LOCATION: DWTC, DUBAI, UAE	
DATE/TIME: 12.20.23	LOCATION: BOOTH DETAILS	SHEET NO. 21

GULFOOD 2024 - PHILIPPINE PAVILION

TECHNICAL DRAWINGS

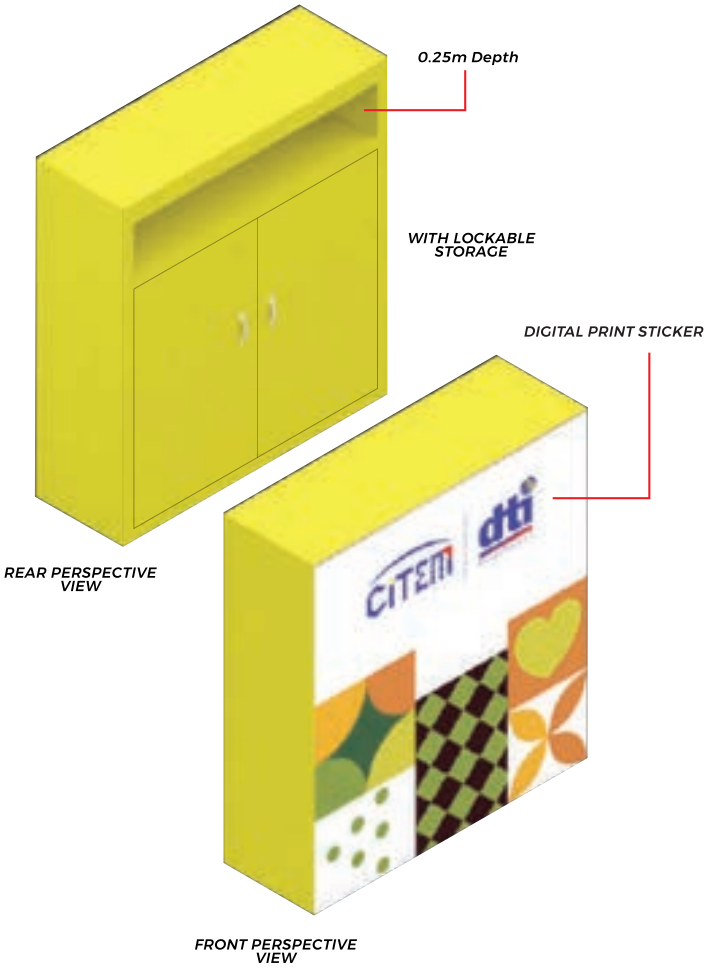

TOP VIEW

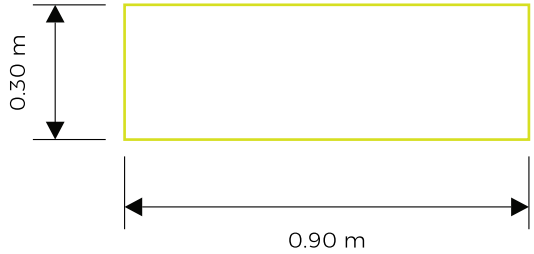

SIDE VIEW

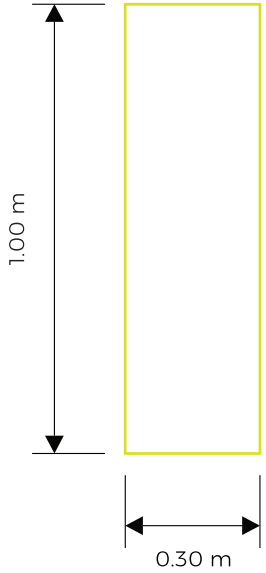

FRONT VIEW

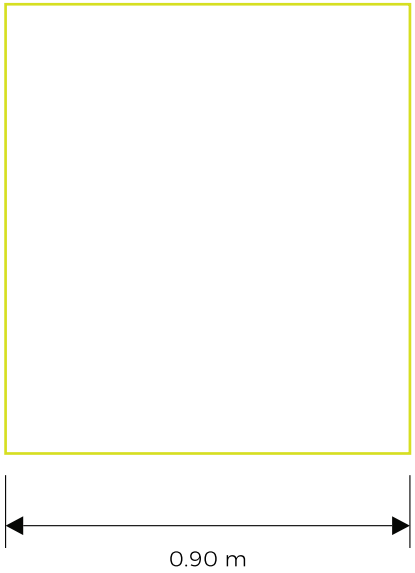

REAR VIEW

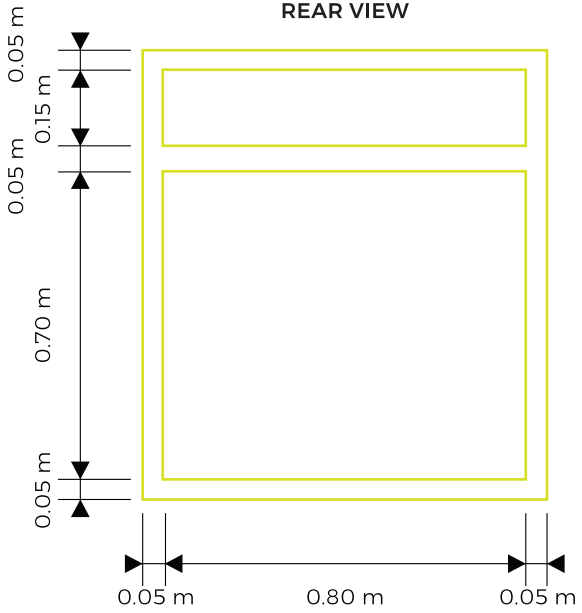

LEGEND:

CITEM AREA COUNTER TABLE

CITEM AREA COUNTER TABLE

BOOTH DETAILS





	PROJECT: GULFOOD 2024	
	TITLE: PHILIPPINE PAVILION	
DESIGNED BY: ACGV	LOCATION: DWTC, DUBAI, UAE	
DATE/TIME: 12.20.23	LOCATION: BOOTH DETAILS	SHEET NO. 22

TECHNICAL DRAWINGS

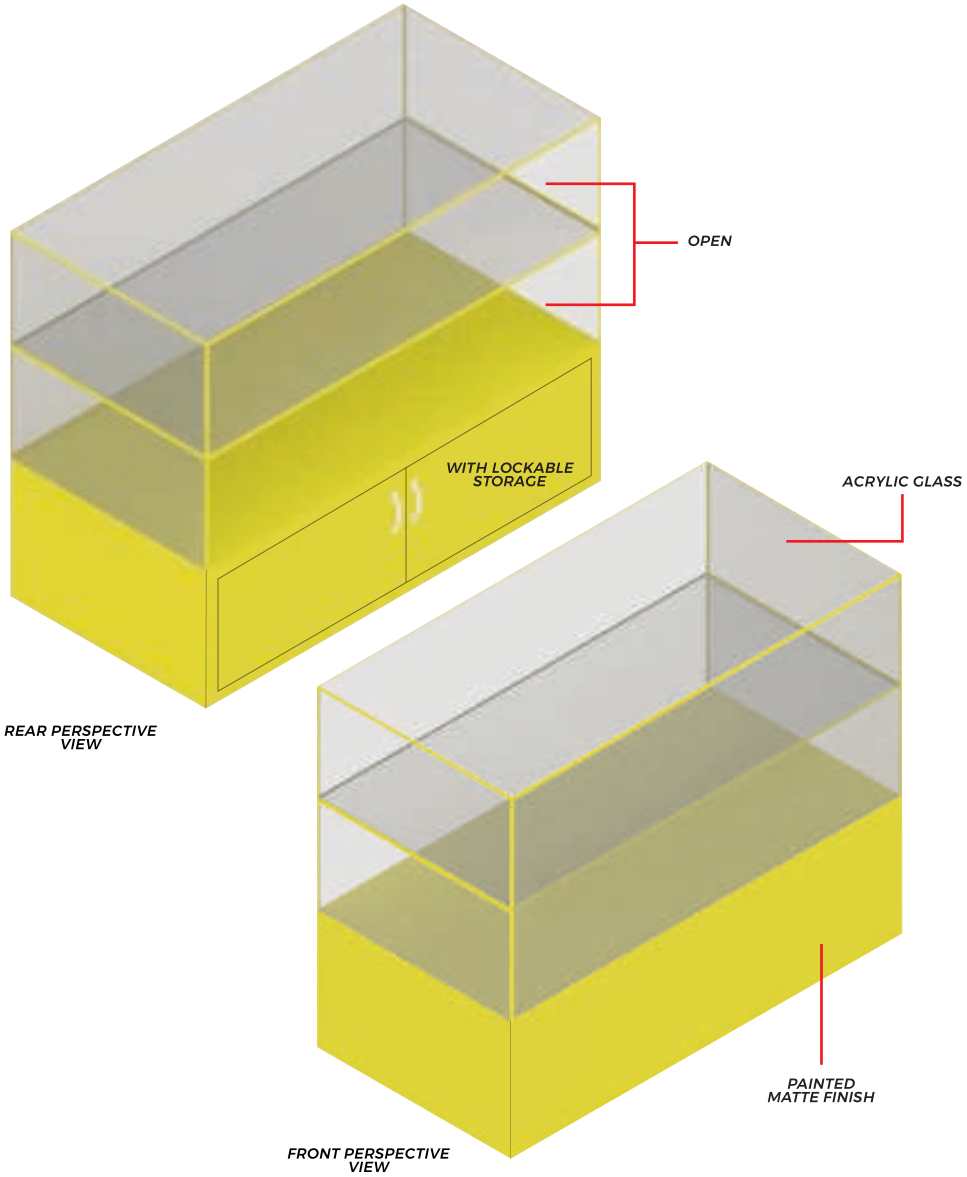

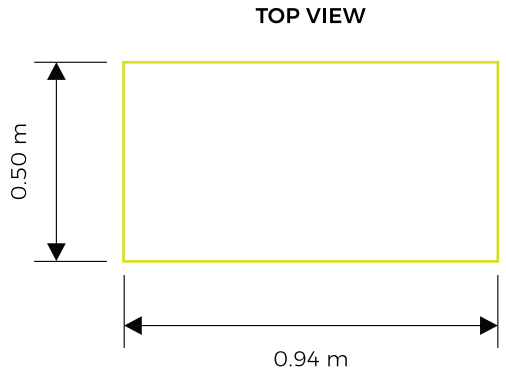

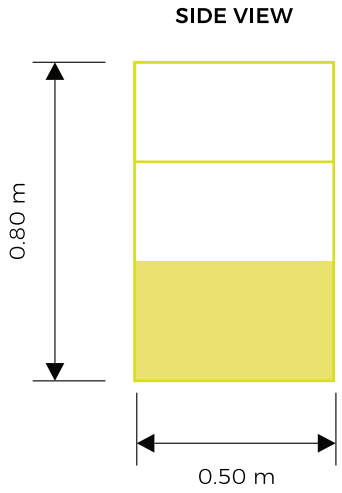

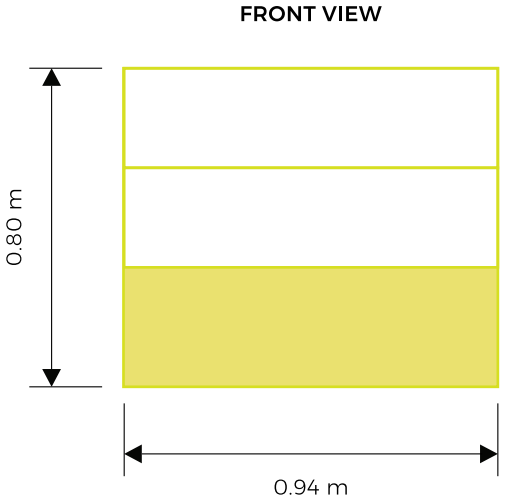

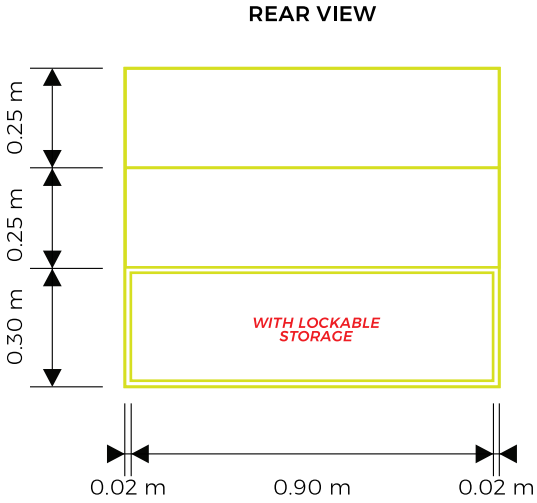

SHORT DISPLAY SHOWCASE

DISPLAY SHOWCASE DETAILS

	PROJECT: GULFOOD 2024	
	TITLE: PHILIPPINE PAVILION	
DESIGNED BY: ACGV	LOCATION: DWTC, DUBAI, UAE	
DATE/TIME: 12.20.23	LOCATION: DISPLAY SHOWCASE DETAILS	SHEET NO. 23

TECHNICAL DRAWINGS

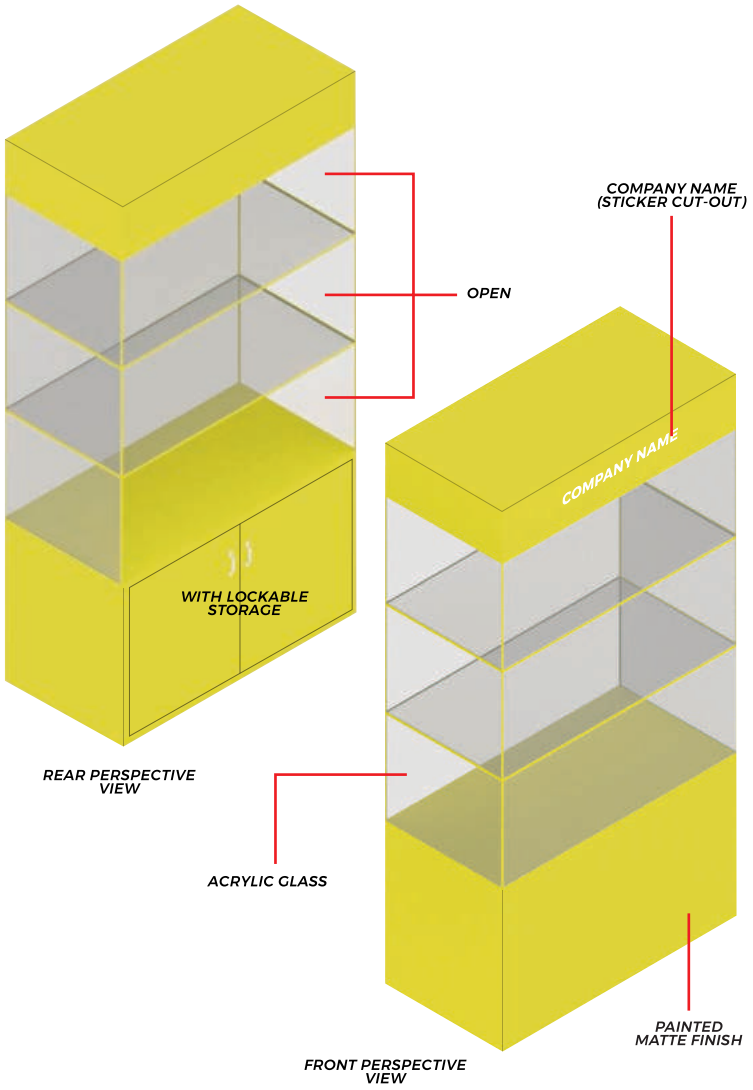

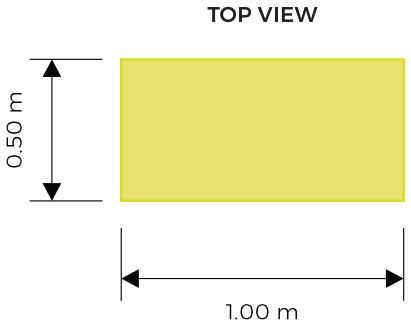

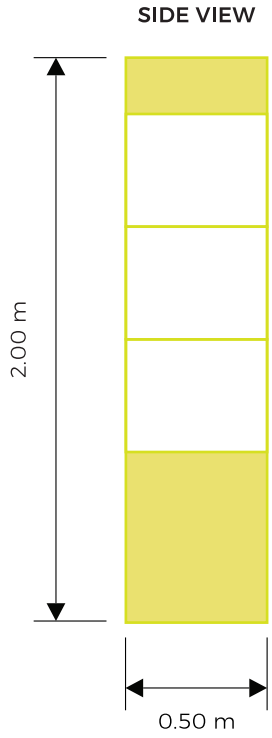

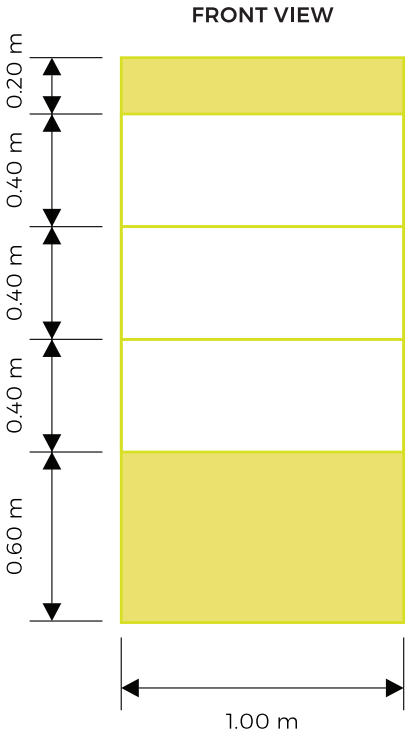

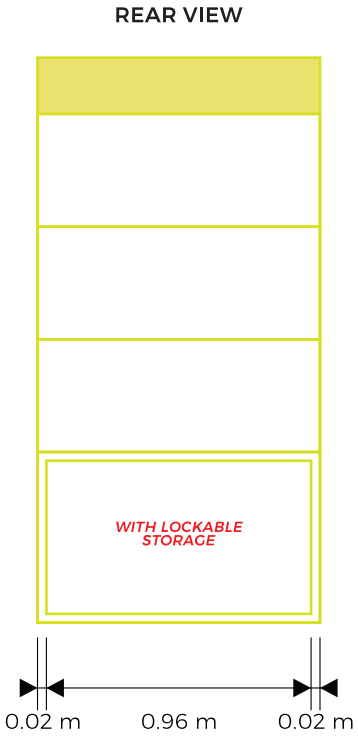

TALL DISPLAY SHOWCASE

DISPLAY SHOWCASE DETAILS

	PROJECT: GULFOOD 2024	
	TITLE: PHILIPPINE PAVILION	
DESIGNED BY: ACGV	LOCATION: DWTC, DUBAI, UAE	
DATE/TIME: 12.20.23	LOCATION: DISPLAY SHOWCASE DETAILS	SHEET NO. 24

CHECKLIST

CHECKLIST					
PAVILION					
ITEM NO.	PARTICULARS	QTY	UNIT	DESCRIPTION	REMARKS
1	PAVILION STRUCTURE	2	SETS	3.00m x 21.00m x 2.40mH Wooden Structure with Storage Area, Printed Graphics and Sticker Cut-Outs	*see details on technical drawings
2	SHELVINGS	40	UNITS	0.80m x 0.60m x 0.05mH L-Type Wooden Shelving	*see details on technical drawings
3	FLOORING	2	LOTS	3.00m x 21.00m Carpet (available colors same or near as the Pavilion color)	*see details on technical drawings
4	BACKLIT COMPANY/BOOTH BOARDS	20	UNITS	0.60m x 1.20mH Lighted Acrylic with Back to Back Printed Graphics/Signage	*see details on technical drawings
5	CITEM AREA TABLE	1	SET	0.90m x 0.30m x 1.00mH CITEM Area Wooden Counter Table with Lockable Storage with Printed Graphics/Signage	*see details on technical drawings
6	SHORT DISPLAY SHOWCASE	3	UNITS	0.94m x 0.50m x 0.80mH Short Wooden Display Showcase with Acrylic Glass and Printed Sticker Cut-Outs	*see details on technical drawings
7	TALL DISPLAY SHOWCASE	17	UNITS	1.00m x 0.50m x 2.00mH Tall Wooden Display Showcase with Acyrlic Glass and Printed Sticker Cut-Outs	*see details on technical drawings
8	ROUND TABLES	21	UNITS	0.60 Diameter White Table	*see details on technical drawings
9	CHAIRS	44	UNITS	White Chair	*see details on technical drawings
10	BAR STOOL	1	UNIT	White Bar Stool for CITEM Area	*see details on technical drawings
11	T5 TUBE LIGHT	21	UNITS	7W T5 Tube Light - Daylight (Mounted on Storage Areas)	*see details on technical drawings
12	SPOTLIGHTS	44	UNITS	30W White Casing Spotlight - Daylight (Mounted 2 pcs on each Exhibitors and CITEM Area)	*see details on technical drawings
13	DOOR CURTAIN	20	SETS	1.00m x 1.90mH Japanese Type Door Curtain with Digital Print (Material: Canvas, Attached to a Curtain Rod)	*see details on technical drawings
14	9.70m Food Philippines BUILT-UP SIGNAGE	2	SETS	9.70m Length Overhead Food Philippines Built-Up Lighted Acrylic Signage (0.10m Depth)	*see details on technical drawings
15	OVERHEAD	2	SETS	21.00m x 1.00m x 2.60mH Wooden Overhead Structure with Printed Graphics	*see details on technical drawings
16	LIGHTBOX A	1	UNIT	1.00m x 1.00m (0.10m Depth) Lightbox with Printed Graphics Mounted on Overhead	*see details on technical drawings
17	LIGHTBOX B	2	UNITS	1.05m x 1.05m (0.10m Depth) Lightbox with Printed Graphics Mounted on Overhead	*see details on technical drawings
18	LIGHTBOX C	3	UNITS	1.05m x 1.05m (0.20m Depth) Lightbox with Printed Graphics Mounted on Overhead	*see details on technical drawings
19	LIGHTBOX D	1	UNIT	1.05m x 1.05m (0.30m Depth) Lightbox with Printed Graphics Mounted on Overhead	*see details on technical drawings
20	LIGHTBOX E	1	UNIT	1.10m x 1.05m (0.10m Depth) Lightbox with Printed Graphics Mounted on Overhead	*see details on technical drawings
21	LIGHTBOX F	1	UNIT	1.55m x 1.00 (0.10m Depth) Lightbox with Printed Graphics Mounted on Overhead	*see details on technical drawings
22	LIGHTBOX G	2	UNITS	1.55m x 1.05m (0.10m Depth) Lightbox with Printed Graphics Mounted on Overhead	*see details on technical drawings
23	LIGHTBOX H	2	UNITS	1.05m x 1.55m (0.30m Depth) Lightbox with Printed Graphics Mounted on Overhead	*see details on technical drawings
24	LIGHTBOX I	1	UNIT	1.60m x 1.00m (0.30m Depth) Lightbox with Printed Graphics Mounted on Overhead	*see details on technical drawings
25	LIGHTBOX J	1	UNIT	1.60m x 1.05m (0.20m Depth) Lightbox with Printed Graphics Mounted on Overhead	*see details on technical drawings
26	LIGHTBOX K	1	UNIT	1.60m x 1.05m (0.30m Depth) Lightbox with Printed Graphics Mounted on Overhead	*see details on technical drawings
27	LIGHTBOX L	1	UNIT	1.55m x 1.55m (0.10m Depth) Lightbox with Printed Graphics Mounted on Overhead	*see details on technical drawings
28	LIGHTBOX M	1	UNIT	1.55m x 1.55m (0.20m Depth) Lightbox with Printed Graphics Mounted on Overhead	*see details on technical drawings
29	LIGHTBOX N	1	UNIT	1.55m x 1.55m (0.30m Depth) Lightbox with Printed Graphics Mounted on Overhead	*see details on technical drawings
30	LIGHTBOX O	1	UNIT	1.05m x 2.60m (0.20m Depth) Lightbox with Printed Graphics Mounted on Overhead	*see details on technical drawings
31	ELECTRICAL OUTLETS	22	UNITS	300W Electrical Outlets 3-Gang	
32	TRASHBIN	22	SETS	Trashbin with 1 Allocated Trashbag Per Day	
33	WATER DISPENSER	1	UNIT	Hot and Cold Water Dispenser (Floor Standing)	
34	WATER GALLON	25	GAL	Water Gallon Per Day (5 GAL/Day)	
35	COFFEE MAKER	1	UNIT	Commercial Coffee Maker	
36	PAPER CUPS & STIRRER	600	CUPS/SETS	Coffee Condiments Organizer	
37	COFFEE/CREAMER	6	BAGS	Coffe Bag, Creamer & Sugar	
38	TV	1	UNIT	TV Wall Mounted 52" Mounted on CITEM Area	*see details on technical drawings
39	DIGITAL GRAPHICS	50	SQM	Digital Print Sticker Graphics with Matte Lamination mounted on surface, foamboard or pvc board	
40	CIRCUIT BREAKER	1	LOT	Contractor to provide appropriate circuit breaker for all electrical requirements of the pavilion	
41	ELECTRICAL CONSUMPTION	1	LOT	Contractor to provide electricity for the pavilion for the duration of the show (electrical consumption to be estimated by contractor with each convenience outlet having 300watts allocation per day).	
FOR OPENING CEREMONY					
42	MICROPHONE	2	UNITS	Microphone for Opening Ceremony	
43	FULL RANGE HOUSE SPEAKER	1	SET	House Speakers for Opening Ceremony	
44	MULTI CHANNEL MIXER	1	LOT	Multi Channel Mixer with Laptop Connected LED TV and Speakers (Must be compatible to play MP3/MP4)	
45	FLOWERS ON STAND	4	SETS	Flowers on Stand	
46	RIBBON SET-UP	1	LOT	Ribbon Set-Up	
47	GOLD SCISSORS	8	PCS	Gold Scissors	
48	HELPERS	2	PAX	Hauling-in of product samples delivered by distributors from outside the venue to Philippine Booth on Ingress	
NOTE					
SEE TECHNICAL DRAWINGS FOR ACTUAL DETAILS					
PLEASE INCLUDE ELECTRICAL CONSUMPTION FOR THE DURATION OF THE SHOW (INGRESS TO EVENT PROPER TO EGRESS) AND INCLUDE ALL APPLICABLE TAXES IF ANY					
INCLUDE ALL APPROPRIATE TAXES IN QUOTATION					